

Glassbond Instant Adhesive L229 Gel

Characteristics

- Thixotropic, shear-thinning properties
- Anti-sagging properties
- One-component adhesive, no need for hardeners
- Cures at room temperature
- Invisible bond line

Recommended For

Glass	Ceramic
Metal	Leather
Plastics	Card
Wood	Paper
Rubber	

Description

Glassbond Instant Adhesive L229 is a moisture-activated, one-component adhesive. This grade demonstrates a thixotropic nature allowing it to be applied to vertical surfaces without running off.

Physical properties

Appearance	Clear to cloudy gel
Specific gravity (at 25°C)	1.06g/cm ³
Viscosity (at 25°C, Brookfield RV)	90,000 – 130,000cP
Flash point	>81°C
Cure time (at 25°C)	24 hours


Bonding speed

	Time (seconds)
Steel	30 to 45
Aluminium	15 to 25
Polycarbonate	15 to 25
Aluminium to glass	15

Bonding speed is defined as the time taken to develop a strength of 0.1N/mm² at 22°C and 50% relative humidity in accordance with ISO 4587.

Temperature Tolerance

Tested on mild steel, cured for 24 hours and conditioned to test temperature for 60 minutes prior to pull test.

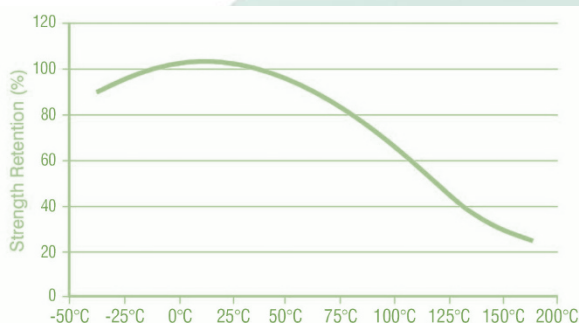

Physical properties were determined on specimens prepared under laboratory conditions. Actual field conditions may vary and yield different results; therefore, data are subject to reasonable deviation. Data should not be used for specification purposes.

Application/Instructions

PREPARATION – Bring the adhesive to room temperature prior to use and ensure the surfaces to be bonded are clean and free from dirt or grease. Cleaning can be carried out with standard grade solvents such as IMS or acetone. This adhesive uses residual surface moisture to cure so there is no requirement to dry the surfaces prior to use. The substrate that doesn't have adhesive applied to it can be prepared by carefully exhaling on it to create a humid environment.

APPLICATION - Use as thin a bond line as possible while ensuring complete coverage of the target area. Apply Glassbond Instant Adhesive L229 to one substrate and hold the parts together firmly by hand. If the substrates are able to be clamped together the tensile/torque strength can be improved. The thinner the bond line, the stronger the bond. Due to its thixotropic nature this adhesive won't run and should demonstrate a good ability to stay in place when applying. Avoid contact with natural fibres such as cotton and wool.

Setting/Curing

When bonding glass to metal Glassbond Instant Adhesive L229 will form a hand-tight grip within seconds however other substrates may vary in bonding speed. Suitable pressure by hand should be applied when bonding. Full strength will be achieved after 24 hours at room temperature.

Cleaning

Excess adhesive should be left to set before scraping or abrading away with an emery board.

Packaging

This material is supplied in various types and sizes of containers. Please contact Glassbond's sales department for further details (sales@glassbond.co.uk).

Shelf Life

Glassbond Instant Adhesive L229 has a shelf life of six (6) months when stored in unopened, tightly sealed containers in a dry location at 2°C to 10°C. Maximum storage temperature is 25°C. HDPE containers do not offer a complete barrier, store away from other chemicals and sources of humidity. Strong light exposure can discolour product. If there is doubt as to the quality of the material, consult Glassbond.

Caution

Consult the Material Safety Data Sheets and container label caution statements for any hazards in handling this material.

Warranty

We warrant that our goods will conform to the description contained in the order and that we have good title to all goods sold. WE GIVE NO WARRANTY, WHETHER OF MERCHANTABILITY, FITNESS FOR PURPOSE OR OTHERWISE, EXPRESS OR IMPLIED, OTHER THAN AS EXPRESSLY SET FORTH HEREIN. Users shall determine the suitability of the product for intended application before using.